

# 6A20010

---

Category 6A, F/UTP Cable, non-plenum, blue jacket, 4 pair count, 1000 ft (305 m) length reel

## Product Classification

<b>Regional Availability</b>	Asia
<b>Portfolio</b>	LITANG®
<b>Product Type</b>	Twisted pair cable

## General Specifications

<b>Product Number</b>	6A20010
<b>ANSI/TIA Category</b>	6A
<b>Cable Component Type</b>	Horizontal
<b>Cable Type</b>	F/UTP (shielded)
<b>Conductor Type, singles</b>	Solid
<b>Conductors, quantity</b>	8
<b>Drain Wire Type</b>	Solid
<b>Jacket Color</b>	Blue
<b>Pairs, quantity</b>	4
<b>Separator Type</b>	Isolator
<b>Transmission Standards</b>	ANSI/TIA-568-C.2   ISO/IEC 11801 Class EA


## Dimensions

<b>Cable Length</b>	1000 ft   304.8 m
<b>Diameter Over Jacket, nominal</b>	0.283 in   7.188 mm
<b>Conductor Gauge, singles</b>	23AWG 26AWG

## Cross Section Drawing

# 6A20010

---

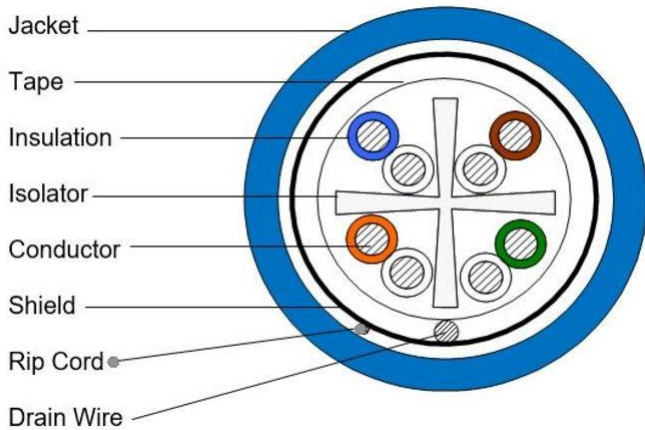

## Electrical Specifications

<b>Dielectric Strength, minimum</b>	1500 Vac   2500 Vdc
<b>Nominal Velocity of Propagation (NVP)</b>	64 %
<b>Operating Voltage, maximum</b>	80 V
<b>Remote Powering</b>	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A

## Material Specifications

<b>Conductor Material</b>	Bare copper
<b>Insulation Material</b>	Polyolefin
<b>Jacket Material</b>	PVC
<b>Shield (Tape) Material</b>	Aluminum/Polyester

# 6A20010

---

## Mechanical Specifications

**Pulling Tension, maximum** 25 lb | 11.34 kg

## Environmental Specifications

**Installation temperature** 0 °C to +60 °C (+32 °F to +140 °F)

**Operating Temperature** -20 °C to +60 °C (-4 °F to +140 °F)

**Environmental Space** Non-plenum

**Flame Test Method** CM

## Packaging and Weights

**Packaging Type** Reel

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.litangcables.com/ProductCompliance">www.litangcables.com/ProductCompliance</a>
ROHS	Compliant

