


720003

720003 Category 7 S/FTP Cable, low smoke zero halogen, yellow jacket, 4 pair count, 1640 ft (500 m) length, reel



Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America
Portfolio	LITANG®
Product Type	Twisted pair cable
Ordering Note	Available in Europe, Middle East, and Africa


General Specifications

Product Number	720003
ANSI/TIA Category	7
Cable Component Type	Horizontal
Cable Type	S/FTP (shielded)
Conductor Type, singles	Solid
Conductors, quantity	8
Jacket Color	Yellow
Note	All electrical transmission tests include swept frequency measurements
Pairs, quantity	4
Transmission Standards	CENELEC EN 50288-4-1 ISO/IEC 11801 Class F

Dimensions

Cable Length	1640 ft 499.872 m
Cable Length Tolerance	±5%
Diameter Over Jacket, nominal	0.291 in 7.391 mm
Jacket Thickness	0.025 in 0.635 mm
Conductor Gauge, singles	23 AWG

Cross Section Drawing

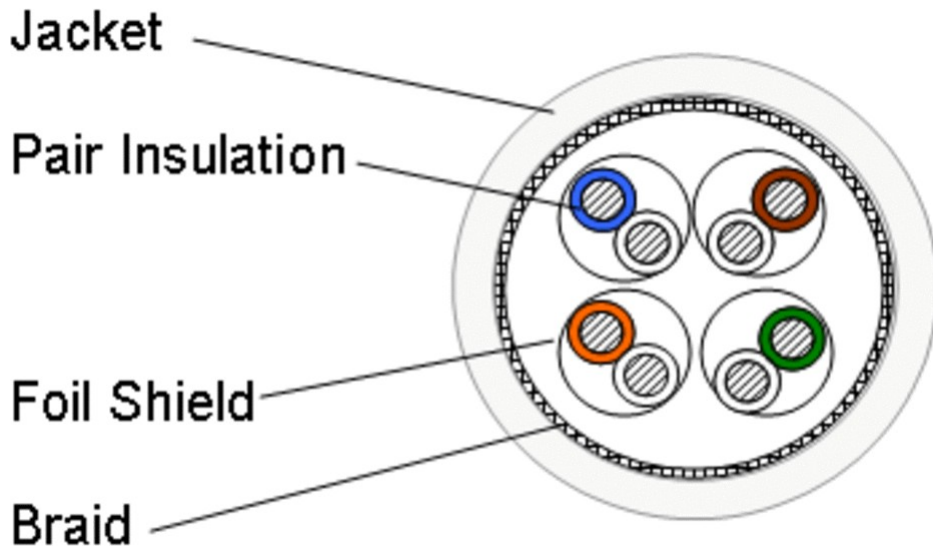

Electrical Specifications

dc Resistance Unbalance, maximum	2 %
dc Resistance, maximum	7.61 ohms/100 m 2.32 ohms/100 ft
Mutual Capacitance at Frequency	4.2 nF/100 m @ 1kHz
Nominal Velocity of Propagation (NVP)	80 %
Operating Frequency, maximum	600 MHz
Operating Voltage, maximum	80 V

Electrical Performance

720003

IL	Insertion Loss (dB/100m)
NEXT	Near End Crosstalk (dB/100m)
PSNEXT	Power Sum Near End Crosstalk (dB/100m)
ELFEXT	Equal-Level Far End Crosstalk (dB/100m)
PSELFEXT	Power Sum Equal-Level Far End Crosstalk (dB/100m)
RL	Return Loss (dB)

Freq (MHz)	IL	NEXT	PSNEXT	ELFEXT	PSELFEXT	RL
1	2.0	78.0	75.0	78.0	75.0	20.0
4	3.7	78.0	75.0	78.0	75.0	23.0
8	5.2	78.0	75.0	77.2	74.2	24.5
10	5.9	78.0	75.0	75.3	72.3	25.0
16	7.4	78.0	75.0	71.2	68.2	25.0
20	8.3	78.0	75.0	69.3	66.3	25.0
25	9.3	78.0	75.0	67.3	64.3	24.3
31.25	10.4	78.0	75.0	65.4	62.4	23.6
62.5	14.9	75.5	72.5	59.4	56.4	21.5
100	19.0	72.4	69.4	55.3	52.3	20.1
155	24.0	69.5	66.5	51.5	48.5	18.8
200	27.5	67.9	64.9	49.3	46.3	18.0
250	31.0	66.4	63.4	47.3	44.3	17.3
300	34.2	65.2	62.2	45.8	42.8	17.3
350	37.2	64.2	61.2	44.4	41.4	17.3
400	40.0	63.4	60.4	43.3	40.3	17.3
500	45.3	61.9	58.9	41.3	38.3	17.3
550	47.7	61.3	58.3	40.5	37.5	17.3
600	50.1	60.7	57.7	39.7	36.7	17.3
650	52.4	60.2	57.2	39.0	36.0	17.3

*Values above 600 MHz are for engineering purposes only.

Material Specifications

Conductor Material	Bare copper
Insulation Material	Polyolefin
Jacket Material	Low Smoke Zero Halogen (LSZH)
Separator Material	Polyolefin
Shield (Braid) Material	Tinned copper
Shield (Tape) Material	Polyester/Aluminum shield

Mechanical Specifications

Pulling Tension, maximum	25 lb 11.34 kg
---------------------------------	------------------

Environmental Specifications

720003

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Acid Gas Test Method	IEC 60754-2
EN50575 CPR Cable EuroClass	Dca a1 d1 s2
Environmental Space	Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60332-3-24
Smoke Test Method	IEC 61034-2

Packaging and Weights

Cable weight	38.3 lb/kft 5.295 kg/km
Packaging Type	Reel

Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.litangcables.com/ProductCompliance
ROHS	Compliant

